IN THE UNITED STATES DISTRICT COURT

FOR THE DISTRICT OF DELAWARE

VOITH PAPER GMBH & CO. KG, a Company organized and existing under the laws of Germany,	)	
Plaintiff,	)	
v.	)	C.A. No. _____
JOHNSONFOILS, INC., a Delaware Corporation,	)	**JURY TRIAL DEMANDED**
Defendant.	)	

COMPLAINT

Plaintiff VOITH PAPER GMBH & CO. KG (hereinafter referred to as "Plaintiff") by and through its attorneys, hereby demands a jury trial and alleges, upon information and belief, for its Complaint against Defendant JOHNSONFOILS, INC. (hereinafter referred to as "JOHNSONFOILS" or "Defendant"), as follows:

1. Defendant is infringing U.S. Pat. Nos. 5,718,805 and 5,972,168 (collectively hereinafter "the Patents-in-Suit"), which are owned by Plaintiff.

THE PARTIES

2. Plaintiff is a corporation, organized and existing under the laws of Germany, with its principal place of business at Sankt Poeltener Strasse 43, Heidenheim, Germany 89522.

3. Upon information and belief, Defendant JOHNSONFOILS is a corporation organized and existing under the laws of Delaware, and Defendant's registered agent is The Corporation Trust

Company, located at 1209 Orange Street, Wilmington, Delaware 19801.

4. Upon information and belief, Defendant's principal place of business is located at 4399 Corporate Road, Charleston, South Carolina 29405.

JURISDICTION AND VENUE

5. This action arises under the Patent Laws of the United States of America, 35 U.S.C. §§ 101, *et seq*.

6. Subject matter jurisdiction of this Court is proper under 28 U.S.C. §§1331 and 1338.

7. This Court can properly exercise personal jurisdiction over Defendant JOHNSONFOILS, by virtue of the fact that it is incorporated in the State of Delaware, thereby availing itself of the laws of the State of Delaware and deriving the protections and benefits thereof.

8. Venue for the present action properly lies in this District pursuant to 28 U.S.C. §§ 1391(c) and (d).

THE PATENTS-IN-SUIT

9. U.S. Patent No. 5,718,805 (hereinafter "the '805 patent"), entitled "Twin wire former," was duly and legally issued on February 17, 1998, and is generally directed to a twin-wire former for the production of a paper web from a fiber suspension. A true and correct copy of the '805 patent is attached hereto as Exhibit 1.

10. Plaintiff is the assignee of the '805 patent by virtue of an assignment recorded in the Patent Office on April 13, 2007 at REEL 019147, FRAME 0971-74, and as the assignee, Plaintiff enjoys all of the rights and benefits conferred upon the patent owner, including the exclusive right to sue, to license and to collect past and future damages from infringers of the '805 patent.

11. U.S. Patent No. 5,972,168 (hereinafter "the '168 patent"), entitled "Twin wire former," was duly and legally issued on October 26, 1999, and is generally directed to a twin-wire former for

the production of a paper web from a fiber suspension, and methods of use. A true and correct copy of the '168 patent is attached hereto as Exhibit 2.

12. Plaintiff is the assignee of the '168 patent by virtue of an assignment recorded in the Patent Office on April 13, 2007 at REEL 019147, FRAME 0971-74, and as the assignee, Plaintiff enjoys all of the rights and benefits conferred upon the patent owner, including the exclusive right to sue, to license and to collect past and future damages from infringers of the '168 patent.

13. All maintenance fees for the Patents-in-Suit have been properly paid to the United States Patent & Trademark Office.

BACKGROUND

14. The paper making process involves the use of paper formers for the production of a fiber web, in particular a paper web, from a fiber suspension.

15. One such paper former is the Calhoun 5 Paper Former, which was, upon information and belief, originally installed by Beloit Corporation in Calhoun, Tennessee.

16. Upon information and belief, the original Calhoun 5 Paper Former contained certain stationary elements, which promoted the drainage of water during the paper making process.

17. The Patents-in-Suit are directed to paper formers, and their methods of use, that utilize a resilient counterblade technology to promote water drainage.

18. Upon information and belief, Defendant JOHNSONFOILS has entered the business of modifying existing paper forming machines by utilizing a resilient counterblade technology to promote water drainage.

19. Upon information and belief, Defendant JOHNSONFOILS modified the Calhoun 5 Paper Former, for instance by removing the stationary drainage elements and replacing them with infringing resilient counterblade technology.

20. In so doing, Defendant JOHNSONFOILS has materially altered and reconfigured the existing Calhoun 5 Paper Former, rather than merely replaced used or worn parts, and has therefore made a "new" machine.

COUNT 1 - PATENT INFRINGEMENT

21. Plaintiff incorporates by reference the allegations of paragraphs 1 through 20 above as if fully set forth herein.

22. Defendant JOHNSONFOILS has made, used, offered to sell, and/or sold in the United States, and/or imported into the United States, and/or reconstructed, reconfigured, or altered, paper formers, such as the Calhoun 5 paper former and others to be discovered during the course of this lawsuit, that incorporate the technology claimed in the Patents-in-Suit without Plaintiff's authorization.

23. Defendant JOHNSONFOILS has induced and/or engaged in contributory infringement by marketing, selling, distributing, maintaining, repairing, reconstructing and/or servicing, within the United States, paper formers, such as the Calhoun 5 paper former and others to be discovered during the course of this lawsuit, that incorporate the technology claimed in the Patents-in-Suit without Plaintiff's authorization.

24. The aforementioned acts by Defendant, including making, using, selling, offering for sale, importing, marketing, distributing, maintaining, repairing, reconstructing, alerting and/or servicing paper formers, such as the Calhoun 5 paper former and others to be discovered during the

course of this lawsuit, that incorporate the technology claimed in the Patents-in-Suit without Plaintiff's authorization, infringed at least one claim of each of the Patents-in-Suit pursuant to at least Title 35 U.S.C.§ 271(a), (b), and (c).

25. Defendant does not have a license to make, use, sell, offer for sale or import paper formers which incorporate the technology covered by at least one claim of each of the Patents-in-Suit.

26. Defendant's infringement of the Patents-in-Suit has been willful.

PRAYER FOR RELIEF

WHEREFORE, Plaintiff seeks a judgment against Defendant as follows:

a. Declaring that Defendant has infringed the Patents-in-Suit;

b. Declaring that Defendant has induced infringement and engaged in contributory infringement of the Patents-in-Suit;

c. Awarding Plaintiff damages for Defendant's infringement of the Patents-in-Suit;

d. Declaring that Defendant's infringement of the Patents-in-Suit has been willful;

e. Awarding Plaintiff treble damages and attorneys fees for Defendant's willful infringement of the Patents-in-Suit;

f. Declaring that the case is exceptional pursuant to 35 U.S.C.§ 285;

g. Enjoining Defendant from infringing, either directly or indirectly, the Patents-in-Suit; and

h. Awarding Plaintiff such other and further relief as the Court may deem just and proper.

DEMAND FOR JURY TRIAL

Plaintiffs hereby demand a jury trial as to all issues so triable.

YOUNG CONAWAY STARGATT & TAYLOR, LLP



Adam W. Poff (No. 3990)
The Brandywine Building
1000 West Street, 17th Floor
Wilmington, DE 19801
(302) 571-6642
apoff@ycst.com

Attorneys for Plaintiff
VOITH PAPER GMBH & CO. KG

OF COUNSEL:

Neil F. Greenblum
Michael J. Fink
Benjamin P. Kota
GREENBLUM & BERNSTEIN, P.L.C.
1950 Roland Clarke Place
Reston, Virginia 20191
(703) 716-1191

Dated: April 27, 2007

EXHBIT 1

US005718805A

United States Patent [19]

Egelhof et al.

[11] Patent Number: 5,718,805

[45] Date of Patent: *Feb. 17, 1998

[54] **TWIN WIRE FORMER**

[75] Inventors: **Dieter Egelhof**; **Klaus Henseler**, both of Heidenheim, Germany; **Werner Kade**, Neenah, Wis.; **Albrecht Meinecke**, Heidenheim, Germany; **Wilhelm Wanke**, Heidenheim, Germany; **Hans-Jurgen Wulz**, Heidenheim, Germany; **Rudolf Bück**, deceased, late of Heidenheim, Germany, by Else Bück, legal representative

[73] Assignee: **J. M. Voith GmbH**, Heidenheim, Germany

[*] Notice: The term of this patent shall not extend beyond the expiration date of Pat. No. 5,500,091.

[21] Appl. No.: **556,769**

[22] Filed: **Nov. 2, 1995**

Related U.S. Application Data

[63] Continuation of Ser. No. 286,948, Aug. 8, 1994, Pat. No. 5,500,091, which is a continuation of Ser. No. 55,918, Apr. 29, 1993, Pat. No. 5,389,206, which is a continuation of Ser. No. 773,965, filed as PCT/EP90/01313, Sep. 8, 1990, abandoned.

[30] **Foreign Application Priority Data**

Aug. 22, 1989 [DE] Germany 39 27 597.3

[51] **Int. Cl.**[6] **D21F 1/00**

[52] **U.S. Cl.** **162/301**; 162/300

[58] **Field of Search** 162/203, 300, 162/301, 303, 348, 352

[56] **References Cited**

U.S. PATENT DOCUMENTS

3,994,774	11/1976	Halme et al.	162/301
4,425,187	1/1984	Armstrong et al.	162/300
4,532,008	7/1985	Creagan et al.	162/203
4,609,435	9/1986	Tissari	162/352
4,769,111	9/1988	Nevalainen et al.	162/351
4,917,766	4/1990	Koivuranta et al.	162/301
4,925,531	5/1990	Koski	162/301
5,078,835	1/1992	Schiel et al.	162/352
5,185,064	2/1993	Nyman	162/301
5,389,206	2/1995	Buck et al.	162/301
5,500,091	3/1996	Buck et al.	162/301

FOREIGN PATENT DOCUMENTS

0289445	4/1988	European Pat. Off. .	
0296135	6/1988	European Pat. Off. .	
0306759	8/1988	European Pat. Off. .	
3138133	9/1981	Germany .	
3321406	6/1983	Germany .	
3329833	8/1983	Germany .	
3628282	8/1986	Germany .	
8806036.5	5/1988	Germany .	
1125906	10/1965	United Kingdom .	
8604368	7/1986	WIPO .	
9102842	3/1991	WIPO	162/301

OTHER PUBLICATIONS

Tappi Press "1989 Twin-Wire Seminar", Washington Hilton, Washington, D.C., Apr. 12–14, 1989, pp. iii, 103–114.

Primary Examiner—Karen M. Hastings

Attorney, Agent, or Firm—Ostrolenk, Faber, Gerb & Soffen, LLP

[57] **ABSTRACT**

In a twin-wire former for the production of a paper web, two wire belts (**11** and **12**) together form a twin-wire zone which is divided into three sections (I, II and III). In the first section (I) the two wires (**11**, **12**) travel over a curved forming shoe (**16**), or a forming roll (**40**). They form there a wedge-shaped inlet slot (**15**) with which a headbox (**10**) is directly associated. In the second section (II), several resiliently supported strips (**27**) rest against the lower wire (**11**) and between each of said strips (**27**) a rigidly mounted strip (**28**) rests against the upper wire (**12**). In the third section (III) both wire belts (**11**, **12**) pass over another curved forming shoe (**23**).

5 Claims, 2 Drawing Sheets

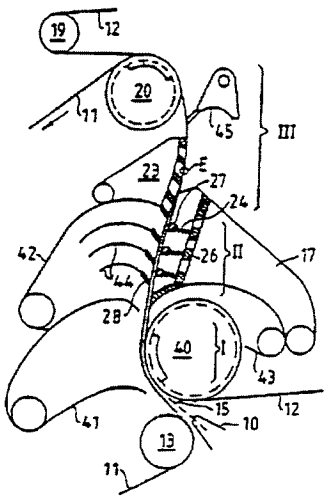

Fig.1

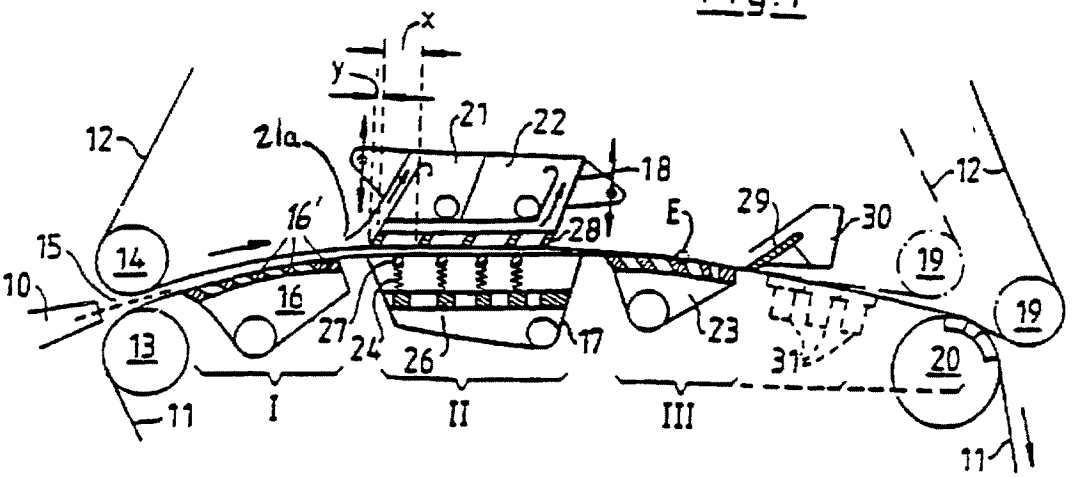

Fig.2

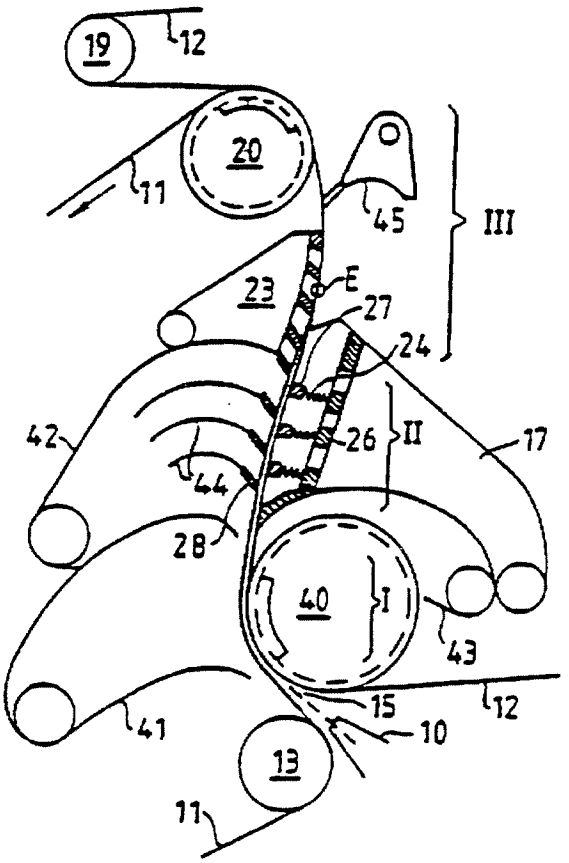

Fig.3

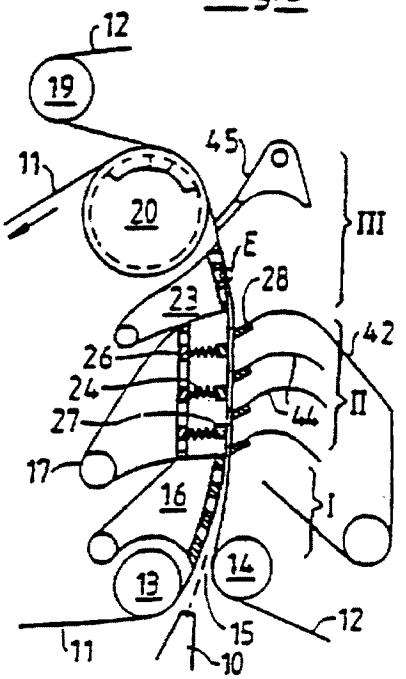

Fig.4

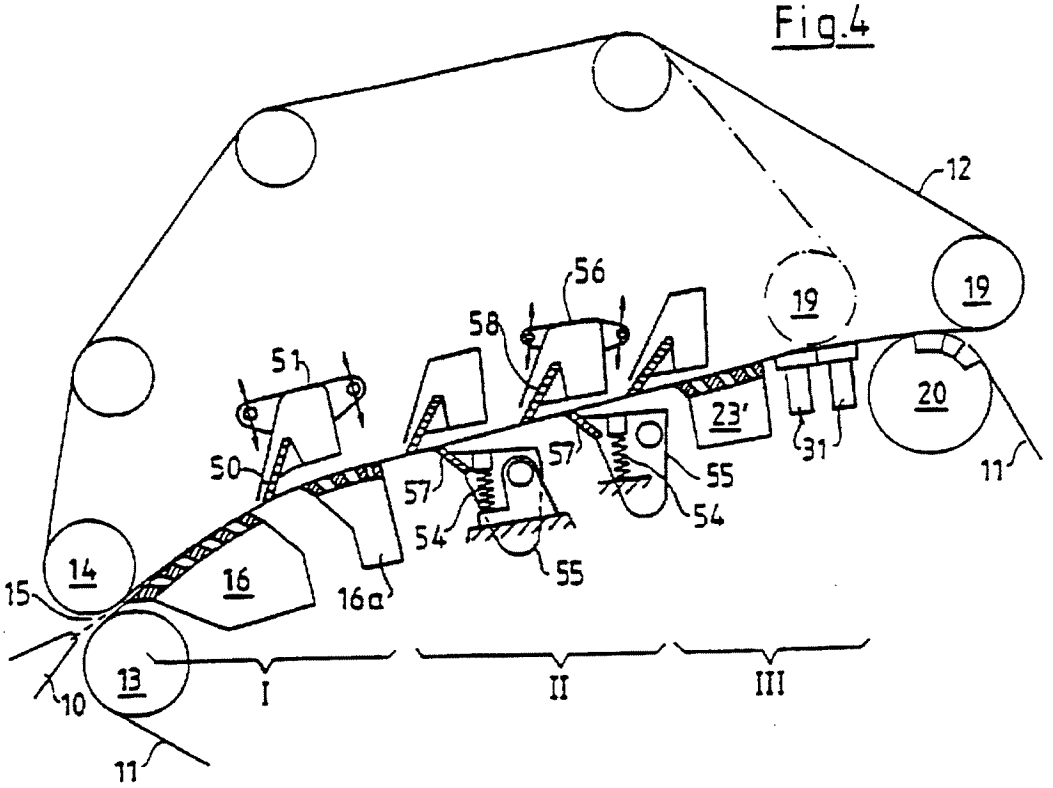
12
56
58
19
19
51
20
23'
50
57
57
55
31
11
54
54
55
14
16
16a
15
13
10
I
II
III
11

Fig.5

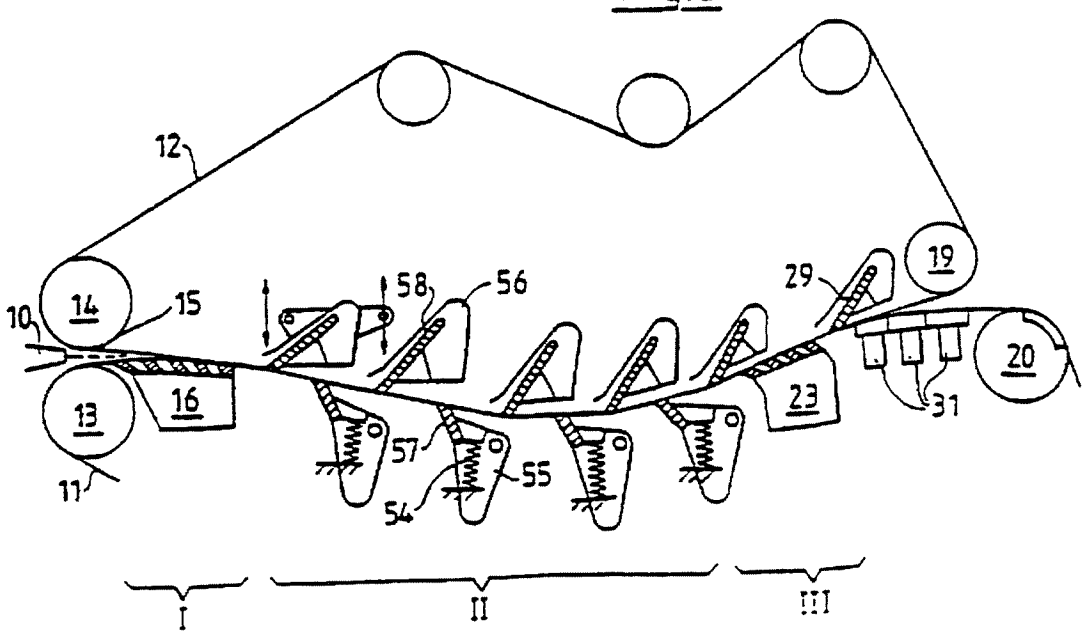
12
19
29
58
56
10
14
15
20
13
16
23
31
57
55
11
54
I
II
III

TWIN WIRE FORMER

RELATED APPLICATIONS

This is a continuing application of, and hereby incorporates by reference the entire disclosure of, application Ser. No. 08/286,948, filed Aug. 8, 1994 now U.S. Pat. No. 5,500,091, which is a continuing application Ser. No. 08/055,918, filed Apr. 29, 1993, issued Feb. 14, 1995 as U.S. Pat. No. 5,389,206, which is a continuing application Ser. No. 07/773,965, filed as PCT/EP90/01313 Sep. 8, 1990, now abandoned.

BACKGROUND OF THE INVENTION

The present invention relates to a twin-wire former for the production of a fiber web, in particular a paper web, from a fiber suspension. The invention proceeds from the basis of the twin-wire former known from British Patent 1 125 906. The features indicated in the patent include a twin wire former for producing a fiber web and particularly a paper web from a fiber suspension. Two web forming wire belts, in the form of endless loops, travel together to form a twin wire zone. The web travels between and along the path of the wire belts through the twin wire zone. The twin wire zone has three sections and the elements in those three sections are described below. The patent describes features that state, in other words, that the forming of the fiber web from the pulp suspension fed from the headbox takes place exclusively between two wire belts. Thus, there is no so-called single-wire pre-drainage path. In a first section of the twin-wire zone, the two wire belts together form a wedge-shaped inlet slot; a jet of pulp slurry coming from the headbox discharges into it. The jet strikes the two wire belts at a place where they pass over a curved drainage element; in the case of the aforementioned British patent, this is a stationary, curved forming shoe. Its curved wire guide surface is formed of a plurality of strips with drainage slots between them. This forming shoe is followed (in a second section of the twin-wire zone) by a drainage strip arranged in the other wire loop and, behind the latter, by a drainage strip arranged in the first-mentioned wire loop (and formed by a first suction box). Finally, in a third section of the twin-wire zone there are a plurality of stationary drainage elements developed as flat suction boxes.

It has been attempted for decades with twin-wire formers of the known type to produce fiber webs (in particular, paper webs) of the highest possible quality with relatively high operating speeds. Due to the forming of the web between two wires, the result, in particular, is obtained that the final fiber web has substantially the same properties on both sides (little "two-sidedness"). However, it is difficult to obtain as uniform as possible a distribution of the fibers in the final fiber web. In other words, it is difficult to obtain a good "formation" since while the web is formed, there is always the danger that fibers will agglomerate and form flocculations. Therefore, it is attempted to form a jet of pulp slurry which pulp slurry is as free as possible of flocculations in the headbox (for instance, by means of a turbulence producer). It is, furthermore, endeavored so to influence the drainage of the fiber suspension during the web-forming that "reflocculation" is avoided as far as possible or that, after possible flocculation, a "deflocculation" (i.e. a breaking up of the flocculations) takes place.

It is known that a curved drainage element arranged in the first section of the twin-wire zone and, in particular, a stationary curved forming shoe developed in accordance with the aforementioned British Patent 1 125 906 counteracts the danger of reflocculation. This is true also of the drainage strips arranged in the British patent in the second section of the twin-wire zone. Nevertheless, the danger of reflocculation is not completely eliminated in the arrangement according to said British patent. Since the number of drainage strips there is very small, a large part of the web-forming takes place in the region of the following flat-suction boxes. They, to be sure, are of high drainage capacity so that the web-forming can be completed in the region of the last flat suction boxes (i.e. the so-called main drainage zone, in which a part of the fiber material is still in the form of a suspension, terminates in the region of the flat suction box). The flat suction boxes, however, are not able to avoid reflocculation or to break up flocculations which have already occurred.

In order to control these last-mentioned difficulties, a web-forming device known under the name of "Duoformer D" has been developed (TAPPI proceedings 1988 annual meeting, pages 75 to 80). This known web-forming device is part of a twin-wire former which has a single-wire pre-drainage zone. In the twin-wire zone there are provided, in the one wire loop, a plurality of strips which are fixed in position but adjustably supported, namely, on the bottom of a suction box which drains in upward direction. Furthermore, a plurality of resiliently supported strips are provided in the other wire loop. By this resilience of the last-mentioned strips, the following result can be obtained: For example, upon an increase of the amount of suspension entering between the two wire belts, the flexibly supported strips can move away somewhat. In this way, the danger (which is present when only firmly supported strips are used) is eliminated of a backing up taking place in the fiber suspension in front of the strips. Such a backing up could destroy the fiber layers which have been formed up to then on the two wire belts. In other words, with this known web-forming device, a drainage pressure, once established, remains constant due to the resiliently supported strips even upon a change in the amount of suspension fed or upon a change in the drainage behavior of the fiber suspension. Therefore, automatic adaptation of the web-forming device to said changed conditions occurs.

With this known web-forming device, fiber webs of relatively good formation can also be formed. With respect to this, however, the demands have increased considerably recently, so that further improvements are desirable.

SUMMARY OF THE INVENTION

The object of the invention is so to develop a twin-wire of the aforementioned kind that the quality of the fiber web produced is further improved, particularly with respect to its formation (cloudiness), and that the twin-wire former can easily be adapted to different operating conditions (for instance, with regard to quantity and drainage behavior of the fiber suspension).

This object is achieved by the features set forth below. In particular, there is a respective drainage strip above each of the two wire belts in the second section of the twin wire zone, and at least one of the two drainage strips is supported resiliently against the respective wire belt while the other may or may not be resiliently supported, and typically is rigidly supported against the respective wire belt. Preferably, there are at least two of the drainage strips and often more against each of the wire belts. The drainage strips against one belt are offset along the path of the wire belts with respect to the drainage strips against the other belt, providing a zig zag or staggered array, and the drainage strips against at least one of the belts are resiliently supported.

The inventors have found that a combination of known features, namely:

A. Twin-wire former without a single-wire pre-drainage zone or at least without a single-wire pre-drainage zone of any substantial length such as to cause any appreciable pre-drainage

B. Start of the drainage in the twin-wire zone at a preferably curved drainage element, for instance on a rotating forming cylinder or, even better, on a curved stationary forming shoe

C. Further drainage in the twin-wire zone between strips which are arranged along a "zig-zag" line, the strips which rest against the one wire belt being resiliently supported,

leads to an extremely high increase in the quality of the finished fiber web, so that it satisfies even the highest requirements. At the same time, the twin-wire former of the invention is insensitive to changes in the amount of suspension fed and to changes in the drainage behavior of the fiber suspension. Experiments have shown that it is possible by the invention to obtain both a high increase in quality with respect to the formation and also good values with regard to the retention of fillers and fines. In contradistinction to this, in the known double-wire formers it is constantly found that there is a strong reduction in the retention upon an improvement in the formation.

It was, furthermore, found in experiments that in the second section of the twin-wire zone the number of strips can be considerably reduced as compared with the "Duoformer D". However, this number is substantially greater than in the case of the twin-wire former known from British Patent 1 125 906. It is advantageous to increase the distance between adjacent strips as compared with the "Duoformer D". In particular, the drainage strips above each one of the wire belts are of a thickness along the path of the wire belts and the spacing between adjacent strips above each wire belt is a minimum of about three times the strip thickness.

To be sure, from German OS 31 38 133, FIG. 3, a twin-wire former is known the twin-wire zone of which is provided in a first section with a curved stationary drainage element and in a second section with strips arranged along a "zig-zag" line, which strips may also be resiliently supported and there being a relatively large distance between them. However, in that case, in front of the twin-wire zone there is a single-wire pre-drainage zone in which the forming of the web starts initially only in a lower layer of the fiber suspension fed while the upper layer remains liquid and tends very strongly to flocculation. It has been found that these flakes cannot be broken up again to the desired extent in the following twin-wire zone. Another disadvantage is that the twin-wire zone is diverted by a guide roll (14*b*) behind the second section. This results (due to the so-called table-roll effect) in a further drainage which is uneven over the width of the web and thus in undesired variations in the quality of the web (recognizable, for instance, by disturbing longitudinal stripes).

BRIEF DESCRIPTION OF THE DRAWINGS

Other developments of the invention will be explained below with reference to embodiments which are shown in the drawing. Each of FIGS. **1** to **5** shows-in simplified diagrammatic form-one of the different embodiments.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The twin-wire former shown in FIG. **1** has a substantially horizontally extending twin-wire zone; this zone comprises three sections I, II and III arranged one behind the other. The endless wire belts (lower wire **11** and upper wire **12**), shown only in part, travel in the direct vicinity of a headbox **10** over, in each case, a breast roll **13** and **14** respectively, so that the two wire belts together form a wedge-shaped entry slot **15** at the start of the twin-wire zone. The jet pulp discharged by the headbox **10** comes into contact with the two wire belts **11** and **12** only at the place where the lower wire **11** in the first section I of the twin-wire zone travels over a stationary curved forming shoe **16**. The curved travel surface thereof is formed of several strips **16'** with drainage slits present between them. The distance between the two breast rolls **13** and **14** is variable. The forming shoe **16** can be operated with or without vacuum. Additionally, although it is preferable that the forming shoe **16** be curved, a straight forming shoe may also be used in certain situations.

In the second section II of the twin-wire zone, the two wire belts **11** and **12** (with the partially still liquid fiber suspension present between them) travel between a lower drainage box **17** and an upper drainage box **18**. In the lower drainage box **17** there are a row of at least two strips **27** (preferably of approximately rectangular cross section) which are pressed from below resiliently against the lower wire **11**. For this purpose, they are supported, for instance, on springs **24** (or pneumatic pressure cushions) on a, preferably water-permeable, plate. It is obvious that the force of the springs (or of the pressure prevailing in the pressure cushions) is individually adjustable.

The upper drainage box **18** is suspended on both the front and rear ends on vertically displaceable support elements as indicated diagrammatically by double arrows. On its lower side, there is a row of at least three strips **28** of preferably parallelogram cross section which rest against the upper side of the upper wire **12** and are rigidly attached to the box **18**. Above the strips **28**, a front vacuum chamber **21** and a rear vacuum chamber **22** are present in the drainage box **18**.

Each of the upper strips **28** scrapes off water from the wire **12**. Accordingly, the amount of water scraped off decreases in the direction of flow of the wire **12** from strip to strip. The drainage water from each of the strips **28** except the drainage water scraped off by the first strip may be drained away jointly. However, it is disadvantageous to also include the drainage water from the first strip **28** since this generally would disturb the operation of the other strips. Accordingly, a vertical channel **21***a* is positioned in front of the first upper strip **28** to carry away or collect the water scraped off by the first strip **28**.

In the region of the forming shoe **16**, a part of the water of the fiber suspension is led off downward; another part penetrates due to the tension of the upper wire **12**-upwards through the upper wire and is deflected by the furthest in front of the strips **28** into the front vacuum chamber **21**. The water passing upward between the upper strips **28** enters into the rear vacuum chamber **22**. The water penetrating between the lower strips **27** through the lower wire **11** is led off downward. Between adjacent upper drainage strips **28** there is a minimum distance X of about three times the thickness Y of the strips. The same is true of the lower resiliently supported strips **27**. It is important that each of the strips **27** and **28** lies in the region of a space between two opposite strips so that a "zig-zag" arrangement (i.e. non-opposing relationship) is present. Also, as seen in FIG. **1**, the first one of the strips **28** is located upstream of the first one of the strips **27**. The two wires **11** and **12** preferably travel on a straight path through section II. Gentle curvature of this section of the path is, however, also possible; see FIGS. **2** and **5**. Differing from FIG. **1**, the resiliently supported strips

could also be arranged in the upper box **18** and the firmly supported strips in the lower box **17**. In the third section III of the twin-wire zone, both wire belts **11** and **12** travel over another preferably curved forming shoe **23** which (as shown) is arranged preferably in the lower wire loop **11**. Behind it, an additional strip **29** with vacuum chamber **30** can be arranged in the loop of the upper wire **12**. Furthermore, flat suction boxes **31** can be present in the loop of the lower wire. There (as is shown by dash-dot lines) the upper wire **12** can be separated by means of a guide roll **19** from the lower wire **11** and from the fiber web formed. Lower wire and fiber web then travel over a wire suction roll **20**. The guide roll **19** can, however, also lie further back, so that the upper wire **12** is separated from the lower wire **11** only on the wire suction roll **20**.

It is important that two drainage boxes **17** and **18** with the alternately resiliently and firmly supported ledge strips **27** and **28** lie not in the front or the rear sections but in the middle section II of the twin-wire zone, since only here can they develop their full effect, namely, intensive drainage of the fiber suspension fed while retaining the fine flocculation-free fiber distribution. This is achieved in the manner that the corresponding wire belt is imparted a slight (scarcely visible) deflection on each strip so that turbulence is constantly produced in the still liquid part of the fiber pulp. For success it is, however, also decisive that previously, in section I, a known pre-drainage towards both sides has already taken place and that this also takes place with the greatest possible retention of the flocculation-free condition of the fiber suspension.

For this two-sided pre-drainage, a stationary preferably curved forming shoe is provided in the first section I of the twin-wire zone (in accordance with FIGS. **1** and **3–5**) whenever it is a question of satisfying the highest quality demands with respect to the formation. This effect of the forming shoe is due to the fact that at least the one wire belt travels polygonally from strip to strip, each strip not only leading water away but also producing turbulence in the pulp which is still liquid. With such a forming shoe, it is, however, difficult at times to obtain a stable operating condition upon the starting of the paper machine. Therefore, it may be advantageous to provide a known forming roll **40** in accordance with FIG. **2** in Section I instead of the stationary forming shoe and the breast roll lying in front of it. This possibility will be utilized when, in particular, the highest productivity is demanded from the paper manufacturing machine.

In the third section III, the aforementioned strip **29** can serve either solely to lead away water upwards or, in addition, for the further production of turbulence (for further improvement in quality). The latter is possible if a part of the fiber pulp is still in liquid condition at this place.

In FIGS. **1** to **3**, the distance between the two wires **11** and **12** in the twin-wire zone has been shown greatly exaggerated. By this, it is intended to make it clear that the two wires **11** and **12** converge towards each other over a relatively long path within the twin-wire zone. This makes it clear that the process of web-forming on the first forming shoe **16** (in Section I) commences relatively slowly and is completed only in Section III. In this connection, the end of the main drainage zone in which the two wires converge towards each other (and thus, the end of the web-forming process) can lie approximately in the center of the wrapping zone of the second forming shoe **23**, as is indicated, merely by way of example, in FIGS. **1** to **3**. The end of the wire convergence is symbolically indicated there by the point E; the solids content of the paper web has reached there approximately the value of 8%. This point can, however, also lie, for instance, on one of the flat suction boxes **31**. Behind this point, it is attempted further to increase the solids content, if possible even before the separation of the two wires. One goal is, namely, for the separation of the wires to take place with the highest possible solids content of the web so that as few fibers as possible are torn out of the web upon the separation. The nature and number of the drainage elements necessary for this within the twin-wire zone may, however, differ greatly and is dependent, among other things, on the type of paper and the raw-material components thereof, as well as on the operating speed.

The embodiments shown in FIGS. **2** and **3** differ from the others primarily by the fact that the twin-wire zone rises substantially vertically upward in the direction of travel of the wires. In this way, the removal of the water withdrawn from the fiber suspension is simplified since the water can be discharged relatively uniformly towards both sides. No vacuum chambers are required in particular in the central section II of the twin-wire zone. To be sure, the forming roll **40** of FIG. **2** is, as a rule, developed as a suction roll. The forming shoes **16**, **23**, particularly those arranged in the third section III, can, if necessary, be provided with a suction device.

Further elements of the twin-wire former shown in FIG. **2** are water-collection containers **41**, **42** and **43**, guide plates **44** associated with the fixed strips **28**, and a water removal strip **45**. The other elements are provided with the same reference numbers as the corresponding elements in FIG. **1**. The same is true with regard to FIG. **3**. One possible modification of FIG. **3** can consist therein that, instead of the wire suction roll **20**, a forming roll is provided, and instead of the guide roll **19** the wire suction roll. A similar arrangement is known from German Utility Model 88 06 036 (Voith File: P 4539). Aside from this exception and aside from the embodiment according to FIG. **2** (with forming roll **40**), the invention will, however, be used whenever possible-so to design the twin-wire former that the relatively expensive forming roll (as to purchase and operation) can be dispensed with. Thus, as a rule, the wire suction roll **20** is present as the sole suction roll. Furthermore, in all embodiments of the invention it can be seen to it that no guide roll which deflects the twin-wire zone (and has the above-mentioned injurious table-roll effect) is present.

The embodiment of FIG. **4** differs from FIG. **1** among other things by the fact that, in the first section I of the twin-wire zone, a second curved stationary forming shoe **16*a*** is arranged in the loop of the lower wire **11** behind and spaced from a first curved stationary forming shoe **16**. Furthermore, in the loop of the upper wire **12** in the region between the two stationary forming shoes **16** and **16*a*** there is provided an individual strip **50** which in known manner is part of a vacuum chamber **51**. This vacuum chamber **51**, similar to the upper drainage box **18** of FIG. **1**, is suspended on its front and rear ends in vertically displaceable mounts. In this way, both the depth of penetration of the strip **50** into the path of travel of the upper wire **12** as well as the angle of attack of the strip **50** can be varied. With slight depth of penetration, the strip **50** serves solely for removal of water, while with greater depth of penetration it serves, in addition, for the production of turbulence in the suspension and, thus, for improvement of the formation. By the presence of two separate forming shoes **16** and **16*a***, the pre-drainage on both sides is temporarily interrupted; it is only continued after the strip **50** has removed from the upper wire **12** the water which has penetrated upward on the first forming shoe **16**. In this way, higher operating speeds are possible.

Another difference from FIG. 1 is that, in the second section II of the twin-wire zone, the lower, flexibly supported strips **57** and the upper, firmly supported strips **58** are developed as individual strips. This means that each strip has its own supporting body **55/56**. The lower strip-supporting bodies **55** are swingably mounted, the strip **57** being pressed resiliently by the force of springs **54** against the bottom of the lower wire **11**. The supporting body **56** of each of the upper strips **58** is developed as vacuum chamber in the same way as that of the strip **50**. The suspension of these vacuum chambers **56** corresponds to that of the vacuum chamber **51**. It is important that each of the strips **57** and **58** rest with a given force of application (corresponding to the suspension pressure) against its wire belt **11** or **12**. The strips **57** and **58** are adjusted in such a manner that a slight deflection of the wire belts takes place preferably on each strip. Due to the resilient supporting of the lower strips **57**, the adjustment, once effected, is insensitive to changes in the quantity or quality of pulp, so that no backing up takes place in front of the strips and, nevertheless, an effective introduction of turbulence forces into the fiber suspension takes place. In contradistinction to FIGS. **1** to **3**, there is the possibility of adjusting each one of the strips **57/58** individually with respect to position in height and inclination relative to the travel path of the wire. In this way, one can even better control the quality of the paper produced, with respect to both the formation and the nature of its surface (printability). Differing from FIG. **4**, the upper strips **58** could be supported resiliently and the lower strips **57** stationary. Another alternative could consist therein that not only the upper strips **58** but also the lower strips **57** are fastened in vertically displaceable mounts (as shown on the vacuum chamber **51**). In such case, the springs **54** might possibly be eliminated.

Another difference between FIGS. **1** and **4** resides in the fact that in FIG. **4** the twin-wire zone rises in the direction of travel of the wires upwards with an inclination of, on the average, about 20° with respect to the horizontal. In this way, it is possible to keep the entire height of the twin-wire former relatively slight. In the third section III of the twin-wire zone, a flat forming shoe **23'** is provided rather than a curved one, differing from FIG. **1**. The separation of the upper wire **12** from the lower wire and the fiber web formed can take place, as in FIG. **1**, on one of the flat suction boxes **31**. Instead of this, however, the upper wire **12** can also be conducted up to the wire suction roll **20**. There, as shown, it can wrap around a small part (or, alternatively, a larger part) of the circumference of the wire suction roll and then be returned via the reversing roll **19**.

In the embodiment shown in FIG. **5**, the twin-wire zone, as a whole, extends substantially in horizontal direction. The individual elements are substantially the same as in the embodiment of FIG. **4**. However, there is the difference that the drainage strips **57** and **58** lying in the second section II of the twin-wire zone are arranged along a downwardly curved path of the twin-wire zone. Accordingly, an upwardly curved forming shoe **16**, **23** is provided in the first section I and in the third section III of the twin-wire zone. This embodiment is advisable, in particular, for the modernizing of existing Fourdrinier paper machines.

The embodiments shown have the feature in common that, in the second section II of the twin-wire zone, there are present preferably n flexibly supported strips **27/57** and n+1 rigidly supported strips. However, it is also possible to make the number of flexibly supported strips equal to or greater by one than the number of rigidly supported strips. Instead of a rigidly supported strip, a feed or discharge edge of a drainage box can also be provided. The minimum number n of flexibly supported strips is two (see FIG. **4**). However, three or four flexibly supported strips are preferred.

What is claimed is:

1. A twin-wire former for the production of a paper web from a fiber suspension, the twin wire former comprising:

first and second web forming wire belts, means for directing the wire belts to travel along a path together for forming a twin wire zone of the twin wire former, with the web between the wire belts as the wire belts travel along the path through the twin wire zone, neither wire belt defining a single wire predrainage zone;

each wire belt forming an endless loop;

the twin wire zone having a first section which includes a first drainage element at the start of the path through the twin wire zone, means for supporting the belts for forming a wedge shaped entrance slot into the first section, a fiber suspension supplying headbox having an outlet placed and directed for delivering fiber suspension from the headbox to the wedge shaped entrance slot of the first section of the twin wire zone;

the twin wire zone having a second section following the first section along the path of the belts through the twin wire zone in the second section, a plurality of first drainage strips are positioned for contacting the first wire belt; in the second section, a plurality of second drainage strips are positioned within the loop of the second wire belt and are for contacting the second wire belt; the first strips being shifted in position along the path of the wire belts with respect to the second strips so that the first and second strips are offset and in a non-opposing relationship; first support means for resiliently supporting the first drainage strips against the respective wire belt that the strips contact;

second support means supporting the second drainage strips rigidly against the second wire belt;

first means for collecting the water drained from the fiber suspension by the most upstream, one of the drainage strips;

second means separate from the first means for collecting the water drained from the fiber suspension by all of the other drainage strips; and

the twin wire zone having a third section following the second section along the path of the wire belts through the twin wire zone; a second drainage element in the third section for being engaged by one of the wire belts as the wire belts travel over the second drainage element, the twin wire zone being free of rolls which deflect the twin wire zone.

2. A twin-wire former for the production of a paper web from a fiber suspension, the twin wire former comprising:

first and second web forming wire belts, means for directing the wire belts to travel along a path together for forming a twin wire zone of the twin wire former, with the web between the wire belts as the wire belts travel along the path through the twin wire zone, neither wire belt defining a single wire predrainage zone;

each wire belt forming an endless loop;

the twin wire zone having a first section which includes a first drainage element at the start of the path through the twin wire zone, means for supporting the belts for forming a wedge shaped entrance slot into the first section, a fiber suspension supplying headbox having an outlet placed and directed for delivering fiber sus-

pension from the headbox to the wedge shaped entrance slot of the first section of the twin wire zone;

the twin wire zone having a second section following the first section along the path of the belts through the twin wire zone; in the second section, a plurality of first drainage strips are positioned for contacting the first wire belt; in the second section, a plurality of second drainage strips are positioned within the loop of the second wire belt and are for contacting the second wire belt; the first strips being shifted in position along the path of the wire belts with respect to the second strips so that the first and second strips are offset and in a non-opposing relationship; first support means for resiliently supporting the first drainage strips against the respective ware belt that the strips contact;

second support means supporting the second drainage strips rigidly against the second wire belt;

first means for collecting the water drained from the fiber suspension by the most upstream one of the drainage strips;

second means separate from the first means for collecting the water drained from the fiber suspension by all of the other drainage strips; and

the twin wire zone having a third section following the second section along the path of the wire belts through the twin wire zone: a second drainage element in the third section for being engaged by one of the wire belts as the wire belts travel over the second drainage element, the twin wire zone being free of any forming rolls.

3. A twin-wire former for the production of a paper web from a fiber suspension, the twin wire former comprising:

first and second web forming wire belts, means for directing the wire belts to travel along a path together for forming a twin wire zone of the twin wire former, with the web between the wire belts as the wire belts travel along the path through the twin wire zone, neither wire belt defining a single wire predrainage zone;

each wire belt forming an endless loop;

the twin wire zone having a first section which includes a first drainage element at the start of the path through the twin wire zone, means for supporting the belts for forming a wedge shaped entrance slot into the first section, a fiber suspension supplying headbox having an outlet placed and directed for delivering fiber suspension from the headbox to the wedge shaped entrance slot of the first section of the twin wire zone;

the twin wire zone having a second section following the first section along the path of the belts through the twin wire zone; in the second section, a plurality of first drainage strips are positioned within the loop of the first wire belt and are for contacting the first wire belt; in the second section, a plurality of second drainage strips are positioned within the loop of the second wire belt and are for contacting the second wire belt; the first strips being shifted in position along the path of the wire belts with respect to the second strips so that the first and second strips are offset and in a non-opposing relationship; first support means for resiliently supporting the first drainage strips against the respective wire belt that the strips contact, the last one of the second drainage strips being located downstream of the last one of the first drainage strips;

second support means supporting the second drainage strips rigidly against the second wire belt;

the twin wire zone having a third section following the second section along the path of the wire belts through the twin wire zone; a second drainage element in the third section for being engaged by one of the wire belts as the wire belts travel over the second drainage element, the second drainage element having an open surface to enable water to be drained through the wire belt in contact therewith; and

the twin wire zone being free of rolls which deflect the twin wire zone.

4. A twin-wire former for the production of a paper web from a fiber suspension, the twin wire former comprising:

first and second web forming wire belts, means for directing the wire belts to travel along a path together for forming a twin wire zone of the twin wire former, with the web between the wire belts as the wire belts travel along the path through the twin wire zone, neither wire belt defining a single wire predrainage zone;

each wire belt forming an endless loop;

the twin wire zone having a first section which includes a first drainage element at the start of the path through the twin wire zone, means for supporting the belts for forming a wedge shaped entrance slot into the first section, a fiber suspension supplying headbox having an outlet placed and directed for delivering fiber suspension from the headbox to the wedge shaped entrance slot of the first section of the twin wire zone;

the twin wire zone having a second section following the first section along the path of the belts through the twin wire zone; in the second section, a plurality of first drainage strips are positioned within the loop of the first wire belt and are for contacting the first wire belt; in the second section, a plurality of second drainage strips are positioned within the loop of the second wire belt and are for contacting the second wire belt; the first strips being shifted in position along the path of the wire belts with respect to the second strips so that the first and second strips are offset and in a non-opposing relationship; first support means for resiliently supporting the first drainage strips against the respective wire belt that the strips contact, the last one of the second drainage strips being located downstream of the last one of the first drainage strips;

second support means supporting the second drainage strips rigidly against the second wire belt;

the twin wire zone having a third section following the second section along the path of the wire belts through the twin wire zone; a second drainage element in the third section for being engaged by one of the wire belts as the wire belts travel over the second drainage element; and

the twin wire zone being free of any forming rolls.

5. A twin-wire former for the production of a paper web from a fiber suspension, the twin wire former comprising:

first and second web forming wire belts, means for directing the wire belts to travel along a path together for forming a twin wire zone of the twin wire former, with the web between the wire belts as the wire belts travel along the path through the twin wire zone, neither wire belt defining a single wire predrainage zone;

each wire belt forming an endless loop;

the twin wire zone having a first section which includes a single first drainage element at the start of the path

through the twin wire zone, means for supporting the belts for forming a wedge shaped entrance slot into the first section, a fiber suspension supplying headbox having an outlet placed and directed for delivering fiber suspension from the headbox to the wedge shaped entrance slot of the first section of the twin wire zone; said single first drainage element in the first section being a single forming roll having an open surface to enable drainage of water from the fiber suspension and being curved along the path of the belts through the twin wire zone, the single forming roll being engaged by one of the wire belts for curving the path of the belts around the single forming roll after the entrance of the suspension into the entrance slot;

the twin wire zone having a second section following the first section along the path of the belts through the twin wire zone; in the second section, a plurality of first drainage strips are positioned within the loop of the first wire belt and are for contacting the first wire belt; in the second section, a plurality of second drainage strips are positioned within the loop of the second wire belt and are for contacting the second wire belt; the first strips being shifted in position along the path of the wire belts with respect to the second strips so that the first and second strips are offset and in a non-opposing relationship; first support means for resiliently supporting the first drainage strips against the respective wire belt that the strips contact;

second support means supporting the second drainage strips rigidly against the second wire belt; and

means for supplying a vacuum in the area of the second drainage strips;

the twin wire zone having a third section following the second section along the path of the wire belts through the twin wire zone; a second drainage element in the third section, for being engaged by one of the wire belts as the wire belts travel over the second drainage element, the second drainage element having an open surface to enable water to be drained through the wire belt in contact therewith; and

the twin wire zone apart from said single forming roll being free of rolls which deflect the twin wire zone.

* * * * *

EXHBIT 2

US005972168A

United States Patent [19]

Egelhof et al.

[11] Patent Number: 5,972,168

[45] Date of Patent: Oct. 26, 1999

[54] **TWIN WIRE FORMER**

[75] Inventors: **Dieter Egelhof**; **Klaus Henseler**, both of Heidenheim, Germany; **Werner Kade**, Neenah, Wis.; **Albrecht Meinecke**, Heidenheim, Germany; **Wilhelm Wanke**, Heidenheim, Germany; **Hans-Jurgen Wulz**, Heidenheim, Germany; **Rudolf Bück**, deceased, late of Heidenheim, Germany, by Elsie Bück, legal representative

[73] Assignee: **Voith Sulzer Papiertechnik Patent GmbH**, Germany

[21] Appl. No.: **09/161,138**

[22] Filed: **Sep. 25, 1998**

Related U.S. Application Data

[62] Continuation of application No. 09/023,435, Feb. 13, 1998, which is a continuation of application No. 08/556,769, Nov. 2, 1995, Pat. No. 5,718,805, which is a continuation of application No. 08/286,948, Aug. 8, 1994, Pat. No. 5,500,091, which is a continuation of application No. 08/055,918, Apr. 29, 1993, Pat. No. 5,389,206, which is a continuation of application No. PCT/EP90/01313, Sep. 8, 1990.

[51] **Int. Cl.**[6] **D21F 1/00**

[52] **U.S. Cl.** **162/203**; 162/301

[58] **Field of Search** 162/203, 300, 162/301, 303, 348, 352

[56] **References Cited**

U.S. PATENT DOCUMENTS

3,056,719	10/1962	Webster	162/203
3,582,467	6/1971	Gustafson et al.	162/303
3,726,758	4/1973	Parker et al.	162/273
3,772,145	11/1973	Notbohm	162/273
3,994,774	11/1976	Halme et al.	162/301
4,609,435	9/1986	Tissari	162/301
4,769,111	9/1988	Nevalainen et al.	162/351
4,917,766	4/1990	Koivuranta et al.	162/301
4,925,531	5/1990	Koski	162/301
4,999,087	3/1991	Ebihara et al.	162/301
5,389,206	2/1995	Buck et al.	162/301

FOREIGN PATENT DOCUMENTS

3138133	9/1981	Germany .
3321406	6/1983	Germany .

Primary Examiner—Karen M. Hastings

Attorney, Agent, or Firm—Ostrolenk, Faber, Gerb & Soffen, LLP

[57] **ABSTRACT**

In a twin-wire former for the production of a paper web, two wire belts (**11** and **12**) together form a twin-wire zone which is divided into three sections (I, II and III). In the first section (I) the two wires (**11**, **12**) travel over a curved forming shoe (**16**). They form there a wedge-shaped inlet slot (**15**) with which a headbox (**10**) is directly associated. In the second section (II), several resiliently supported strips (**27**) rest against the lower wire (**11**) and between each of said strips (**27**) a rigidly mounted strip (**28**) rests against the upper wire (**12**). In the third section (III) both wire belts (**11**, **12**) pass over another curved forming shoe (**23**).

8 Claims, 2 Drawing Sheets

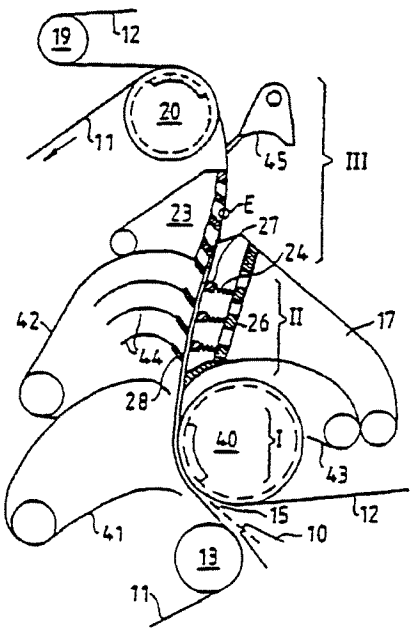

Fig.1

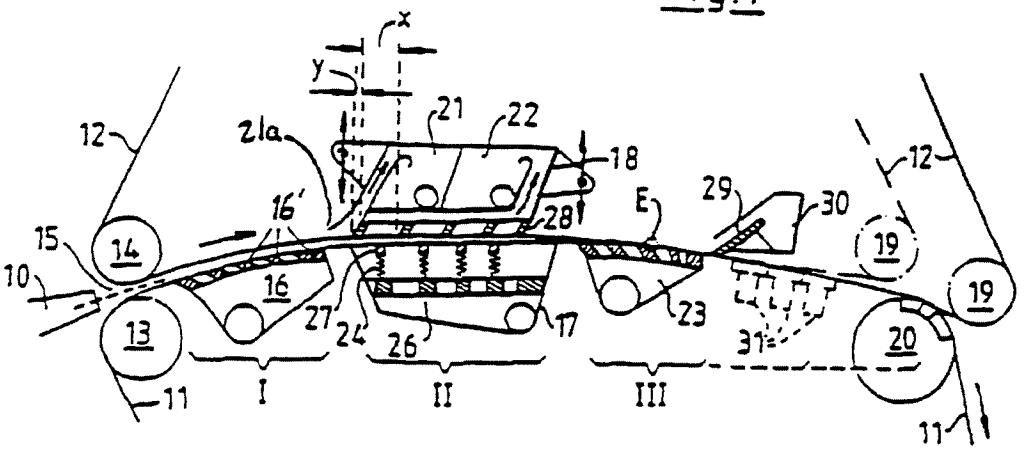

Fig.2

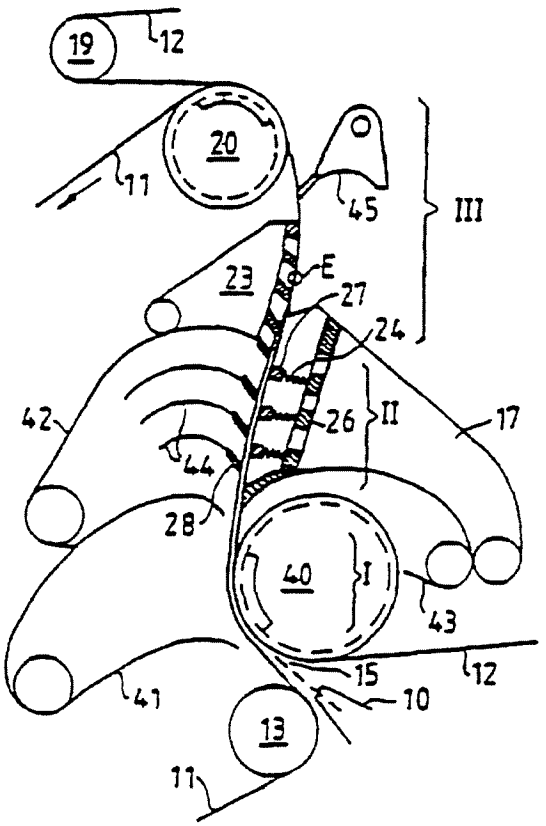

Fig.3

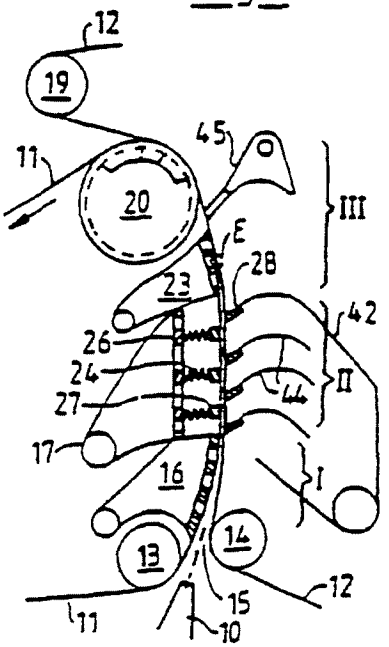

Fig.4

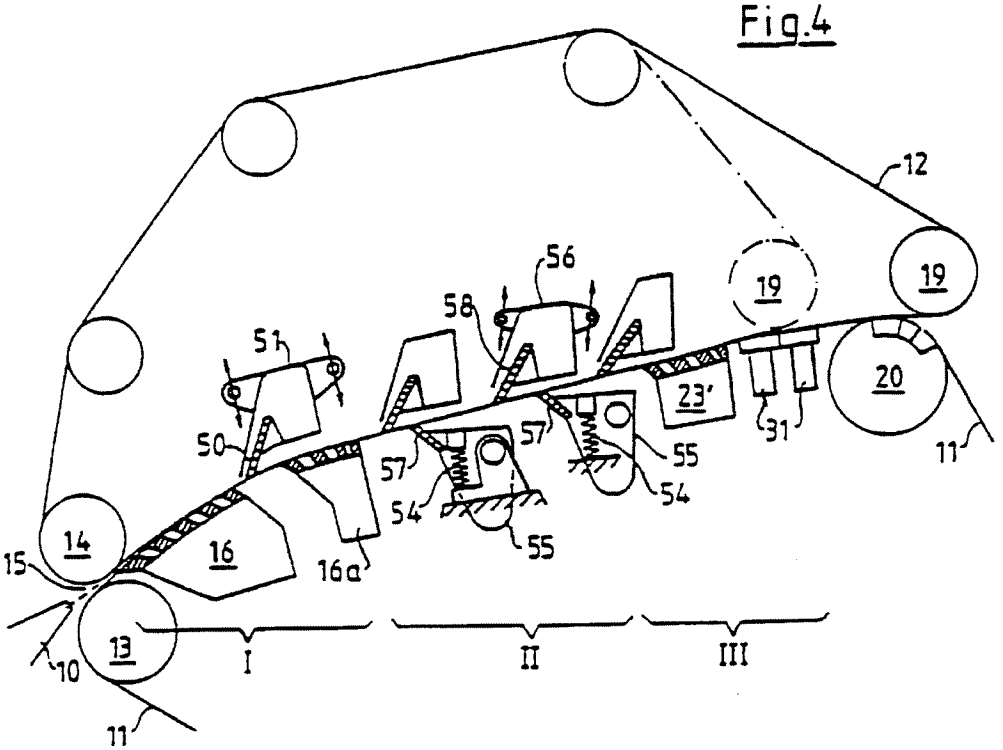
12
56
58
19
19
51
20
23'
50
57
57
55
31
11
54
54
14
55
15
16
16a
13
I
II
III
10
11

Fig.5

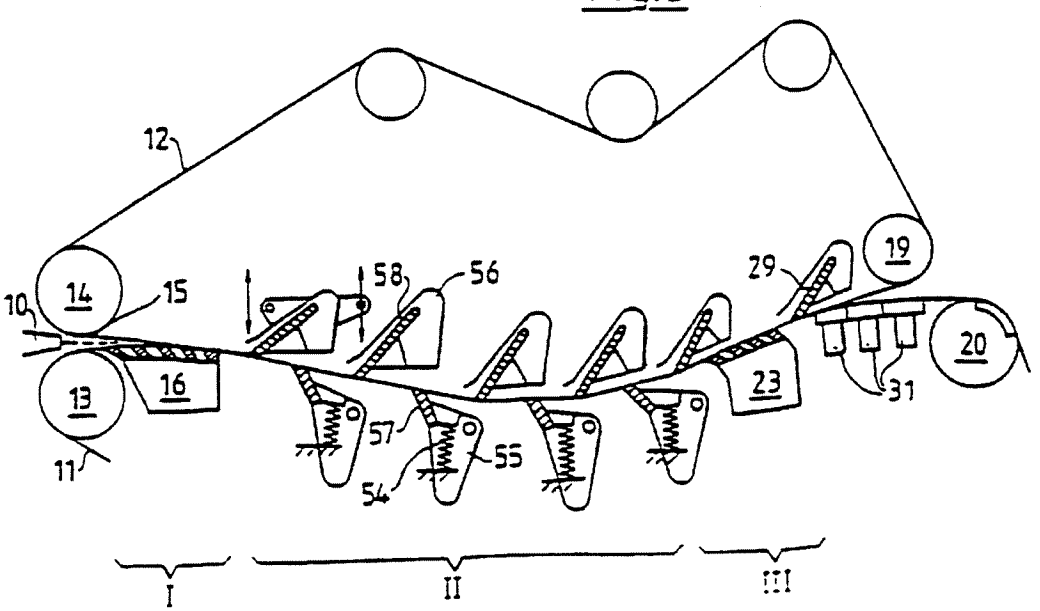
12
19
29
10
14
15
58
56
20
16
23
13
31
57
55
11
54
I
II
III

TWIN WIRE FORMER

RELATED APPLICATIONS

This is a continuing application of, and hereby incorporates by reference the entire disclosure of, application Ser. No. 09/023,435, filed Feb. 13, 1998, allowed, which is a continuing application of Ser. No. 08/556,769, filed Nov. 2, 1995, now Pat. No. 5,718,805, which is a continuing application of Ser. No. 08/286,948, filed Aug. 8, 1994, now Pat. No. 5,500,091, which is a continuing application of Ser. No. 08/055,918, filed Apr. 29, 1993, now Pat. No. 5,389,206, which is a continuing application of Ser. No. 07/773,965, filed Nov. 12, 1991, now abandoned, filed as PCT/EP90/01313 on Sept. 8, 1990, now abandoned.

BACKGROUND OF THE INVENTION

The present invention relates to a twin-wire former for the production of a fiber web, in particular a paper web, from a fiber suspension. The invention proceeds from the basis of the twin-wire former known from British Patent 1 125 906. The features indicated in the patent include a twin wire former for producing a fiber web and particularly a paper web from a fiber suspension. Two web forming wire belts, in the form of endless loops, travel together to form a twin wire zone. The web travels between and along the path of the wire belts through the twin wire zone. The twin wire zone has three sections and the elements in those three sections are described below. The patent describes features that state, in other words, that the forming of the fiber web from the pulp suspension fed from the headbox takes place exclusively between two wire belts. Thus, there is no so-called single-wire pre-drainage path. In a first section of the twin-wire zone, the two wire belts together form a wedge-shaped inlet slot; a jet of pulp slurry coming from the headbox discharges into-it. The jet strikes the two wire belts at a place where they pass over a curved drainage element; in the case of the aforementioned British patent, this is a stationary, curved forming shoe. Its curved wire guide surface is formed of a plurality of strips with drainage slots between them. This forming shoe is followed (in a second section of the twin-wire zone) by a drainage strip arranged in the other wire loop and, behind the latter, by a drainage strip arranged in the first-mentioned wire loop (and formed by a first suction box). Finally, in a third section of the twin-wire zone there are a plurality of stationary drainage elements developed as flat suction boxes.

It has been attempted for decades with twin-wire farmers of the known type to produce fiber webs (in particular, paper webs) of the highest possible quality with relatively high operating speeds. Due to the forming of the web between two wires, the result, in particular, is obtained that the final fiber web has substantially the same properties on both sides (little "two-sidedness"). However, it is difficult to obtain as uniform as possible a distribution of the fibers in the final fiber web. In other words, it is difficult to obtain a good "formation" since while the web is formed, there is always the danger that fibers will agglomerate and form flocculations. Therefore, it is attempted to form a jet of pulp slurry which pulp slurry is as free as possible of flocculations in the headbox (for instance, by means of a turbulence producer). It is, furthermore, endeavored so to influence the drainage of the fiber suspension during the web-forming that "reflocculation" is avoided as far as possible or that, after possible flocculation, a "deflocculation" (i.e. a breaking up of the flocculations) takes place.

It is known that a curved drainage element arranged in the first section of the twin-wire zone and, in particular, a

stationary curved forming shoe developed in accordance with the aforementioned British Patent 1 125 906 counteracts the danger of reflocculation. This is true also of the drainage strips arranged in the British Patent in the second section of the twin-wire zone. Nevertheless, the danger of reflocculation is not completely eliminated in the arrangement according to said British Patent. Since the number of drainage strips there is very small, a large part of the web-forming takes place in the region of the following flat-suction boxes. They, to be sure, are of high drainage capacity so that the web-forming can be completed in the region of the last flat suction boxes (i.e. the so-called main drainage zone, in which a part of the fiber material is still in the form of a suspension, terminates in the region of the flat suction box). The flat suction boxes, however, are not able to avoid reflocculation or to break up flocculations which have already occurred.

In order to control these last-mentioned difficulties, a web-forming device known under the name of "Duoformer D" has been developed (TAPPI Proceedings 1988 annual meeting, pages 75 to 80). This known web-forming device is part of a twin-wire former which has a single-wire pre-drainage zone. In the twin-wire zone there are provided, in the one wire loop, a plurality of strips which are fixed in position but adjustably supported, namely, on the bottom of a suction box which drains in upward direction. Furthermore, a plurality of resiliently supported strips are provided in the other wire loop. By this resilience of the last-mentioned strips, the following result can be obtained: For example, upon an increase of the amount of suspension entering between the two wire belts, the flexibly supported strips can move away somewhat. In this way, the danger (which is present when only firmly supported strips are used) is eliminated of a backing up taking place in the fiber suspension in front of the strips. Such a backing up could destroy the fiber layers which have been formed up to then on the two wire belts. In other words, with this known web-forming device, a drainage pressure, once established, remains constant due to the resiliently supported strips even upon a change in the amount of suspension fed or upon a change in the drainage behavior of the fiber suspension. Therefore, automatic adaptation of the web-forming device to said changed conditions occurs.

With this known web-forming device, fiber webs of relatively good formation can also be formed. With respect to this, however, the demands have increased considerably recently, so that further improvements are desirable.

SUMMARY OF THE INVENTION

The object of the invention is so to develop a twin-wire of the aforementioned kind that the quality of the fiber web produced is further improved, particularly with respect to its formation (cloudiness), and that the twin-wire former can easily be adapted to different operating conditions (for instance, with regard to quantity and drainage behavior of the fiber suspension).

This object is achieved by the features set forth below in particular, there is a respective drainage strip above each of the two wire belts in the second section of the twin wire zone, and at least one of the two drainage strips is supported resiliently against the respective wire belt while the other may or may not be resiliently supported, and typically is rigidly supported against the respective wire belt. Preferably, there are at least two of the drainage strips and often more against each of the wire belts. The drainage strips against one belt are offset along the path of the wire belts with

respect to the drainage strips against the other belt, providing a zig zag or staggered array, and the drainage strips against at least one of the belts are resiliently supported.

The inventors have found that a combination of known features, namely:

A. Twin-wire former without a single-wire pre-drainage zone or at least without a single-wire pre-drainage zone of any substantial length such as to cause any appreciable pre-drainage

B. Start of the drainage in the twin-wire zone at a preferably curved drainage element, for instance on a rotating forming cylinder or, even better, on a curved stationary forming shoe

C. Further drainage in the twin-wire zone between strips which are arranged along a "zig-zag" line, the strips which rest against the one wire belt being resiliently supported, leads to an extremely high increase in the quality of the finished fiber web, so that it satisfies even the highest requirements. At the same time, the twin-wire former of the invention is insensitive to changes in the amount of suspension fed and to changes in the drainage behavior of the fiber suspension. Experiments have shown that it is possible by the invention to obtain both a high increase in quality with respect to the formation and also good values with regard to the retention of fillers and fines. In contradistinction to this, in the known double-wire formers it is constantly found that there is a strong reduction in the retention upon an improvement in the formation.

It was, furthermore, found in experiments that in the second section of the twin-wire zone the number of strips can be considerably reduced as compared with the "Duoformer D". However, this number is substantially greater than in the case of the twin-wire former known from British Patent 1 125 906. It is advantageous to increase the distance between adjacent strips as compared with the "Duoformer D". In particular, the drainage strips above each one of the wire belts are of a thickness along the path of the wire belts and the spacing between adjacent strips above each wire belt is a minimum of about three times the strip thickness.

To be sure, from German OS 31 38 133, FIG. **3**, a twin-wire former is known the twin-wire zone of which is provided in a first section with a curved stationary drainage element and in a second section with strips arranged along a "zig-zag" line, which strips may also be resiliently supported and there being a relatively large distance between them. However, in that case, in front of the twin-wire zone there is a single-wire pre-drainage zone in which the forming of the web starts initially only in a lower layer of the fiber suspension fed while the upper layer remains liquid and tends very strongly to flocculation. It has been found that these flakes cannot be broken up again to the desired extent in the following twin-wire zone. Another disadvantage is that the twin-wire zone is diverted by a guide roll (**14***b*) behind the second section. This results (due to the so-called table-roll effect) in a further drainage which is uneven over the width of the web and thus in undesired variations in the quality of the web (recognizable, for instance, by disturbing longitudinal stripes).

BRIEF DESCRIPTION OF THE DRAWINGS

Other developments of the invention will be explained below with reference to embodiments which are shown in the drawing. Each of FIGS. **1** to **5** shows-in simplified diagrammatic form-one of the different embodiments.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The twin-wire former shown in FIG. **1** has a substantially horizontally extending twin-wire zone; this zone comprises three sections I, II and III arranged one behind the other. The endless wire belts (lower wire **11** and upper wire **12**), shown only in part, travel in the direct vicinity of a headbox **10** over, in each case, a breast roll **13** and **14** respectively, so that the two wire belts together form a wedge-shaped entry slot **15** at the start of the twin-wire zone. The jet pulp discharged by the headbox **10** comes into contact with the two wire belts **11** and **12** only at the place where the lower wire **11** in the first section I of the twin-wire zone travels over a stationary curved forming shoe **16**. The curved travel surface thereof is formed of several strips **16'** with drainage slits present between them. The distance between the two breast rolls **13** and **14** is variable. The forming shoe **16** can be operated with or without vacuum. Additionally, although it is preferable that the forming shoe **16** be curved, a straight forming shoe may also be used in certain situations.

In the second section II of the twin-wire zone, the two wire belts **11** and **12** (with the partially still liquid fiber suspension present between them) travel between a lower drainage box **17** and an upper drainage box **18**. In the lower drainage box **17** there are a row of at least two strips **27** (preferably of approximately rectangular cross section) which are pressed from below resiliently against the lower wire **11**. For this purpose, they are supported, for instance, on springs **24** (or pneumatic pressure cushions) on a, preferably water-permeable, plate. It is obvious that the force of the springs (or of the pressure prevailing in the pressure cushions) is individually adjustable.

The upper drainage box **18** is suspended on both the front and rear ends on vertically displaceable support elements as indicated diagrammatically by double arrows. On its lower side, there is a row of at least three strips **28** of preferably parallelogram cross section which rest against the upper side of the upper wire **12** and are rigidly attached to the box **18**. Above the strips **28**, a front vacuum chamber **21** and a rear vacuum chamber **22** are present in the drainage box **18**.

Each of the upper strips **28** scrapes off water from the wire **12**. Accordingly, the amount of water scraped off decreases in the direction of flow of the wire **12** from strip to strip. The drainage water from each of the strips **28** except the drainage water scraped off by the first strip may be drained away jointly. However, it is disadvantageous to also include the drainage water from the first strip **28** since this generally would disturb the operation of the other strips. Accordingly, a vertical channel **21***a* is positioned in front of the first upper strip **28** to carry away or collect the water scraped off by the first strip **28**.

In the region of the forming shoe **16**, a part of the water of the fiber suspension is led off downward; another part penetrates due to the tension of the upper wire **12**-upwards through the upper wire and is deflected by the furthest in front of the strips **28** into the front vacuum chamber **21**. The water passing upward between the upper strips **28** enters into the rear vacuum chamber **22**. The water penetrating between the lower strips **27** through the lower wire **11** is led off downward. Between adjacent upper drainage strips **28** there is a minimum distance X of about three times the thickness Y of the strips. The same is true of the lower resiliently supported strips **27**. It is important that each of the strips **27** and **28** lies in the region of a space between two opposite strips so that a "zig-zag" arrangement (i.e. non-opposing relationship) is present. Also, as seen in FIG. **1**, the first one of the strips **28** is located upstream of the first one of the strips **27**. The two wires **11** and **12** preferably travel on a straight path through section II. Gentle curvature of this section of the path is, however, also possible; see FIGS. **2** and **5**. Differing from FIG. **1**, the resiliently supported strips

could also be arranged in the upper box **18** and the firmly supported strips in the lower box **17**. In the third section III of the twin-wire zone, both wire belts **11** and **12** travel over another preferably curved forming shoe **23** which (as shown) is arranged preferably in the lower wire loop **11**. Behind it, an additional strip **29** with vacuum chamber **30** can be arranged in the loop of the upper wire **12**. Furthermore, flat suction boxes **31** can be present in the loop of the lower wire. There (as is shown by dash-dot lines) the upper wire **12** can be separated by means of a guide roll **19** from the lower wire **11** and from the fiber web formed. Lower wire and fiber web then travel over a wire suction roll **20**. The guide roll **19** can, however, also lie further back, so that the upper wire **12** is separated from the lower wire **11** only on the wire suction roll **20**.

It is important that two drainage boxes **17** and **18** with the alternately resiliently and firmly supported ledge strips **27** and **28** lie not in the front or the rear sections but in the middle section II of the twin-wire zone, since only here can they develop their full effect, namely, intensive drainage of the fiber suspension fed while retaining the fine flocculation-free fiber distribution. This is achieved in the manner that the corresponding wire belt is imparted a slight (scarcely visible) deflection on each strip so that turbulence is constantly produced in the still liquid part of the fiber pulp. For success it is, however, also decisive that previously, in section I, a known pre-drainage towards both sides has already taken place and that this also takes place with the greatest possible retention of the flocculation-free condition of the fiber suspension.

For this two-sided pre-drainage, a stationary preferably curved forming shoe is provided in the first section I of the twin-wire zone (in accordance with FIGS. **1** and **3–5**) whenever it is a question of satisfying the highest quality demands with respect to the formation. This effect of the forming shoe is due to the fact that at least the one wire belt travels polygonally from strip to strip, each strip not only leading water away but also producing turbulence in the pulp which is still liquid. With such a forming shoe, it is, however, difficult at times to obtain a stable operating condition upon the starting of the paper machine. Therefore, it may be advantageous to provide a known forming roll **40** in accordance with FIG. **2** in Section I instead of the stationary forming shoe and the breast roll lying in front of it. This possibility will be utilized when, in particular, the highest productivity is demanded from the paper manufacturing machine.

In the third section III, the aforementioned strip **29** can serve either solely to lead away water upwards or, in addition, for the further production of turbulence (for further improvement in quality). The latter is possible if a part of the fiber pulp is still in liquid condition at this place.

In FIGS. **1** to **3**, the distance between the two wires **11** and **12** in the twin-wire zone has been shown greatly exaggerated. By this, it is intended to make it clear that the two wires **11** and **12** converge towards each other over a relatively long path within the twin-wire zone. This makes it clear that the process of web-forming on the first forming shoe **16** (in Section I) commences relatively slowly and is completed only in Section III. In this connection, the end of the main drainage zone in which the two wires converge towards each other (and thus, the end of the web-forming process) can lie approximately in the center of the wrapping zone of the second forming shoe **23**, as is indicated, merely by way of example, in FIGS. **1** to **3**. The end of the wire convergence is symbolically indicated there by the point E; the solids content of the paper web has reached there approximately the value of 8%. This point can, however, also lie, for instance, on one of the flat suction boxes **31**. Behind this point, it is attempted further to increase the solids content, if possible even before the separation of the two wires. One goal is, namely, for the separation of the wires to take place with the highest possible solids content of the web so that as few fibers as possible are torn out of the web upon the separation. The nature and number of the drainage elements necessary for this within the twin-wire zone may, however, differ greatly and is dependent, among other things, on the type of paper and the raw-material components thereof, as well as on the operating speed.

The embodiments shown in FIGS. **2** and **3** differ from the others primarily by the fact that the twin-wire zone rises substantially vertically upward in the direction of travel of the wires. In this way, the removal of the water withdrawn from the fiber suspension is simplified since the water can be discharged relatively uniformly towards both sides. No vacuum chambers are required in particular in the central section II of the twin-wire zone. To be sure, the forming roll **40** of FIG. **2** is, as a rule, developed as a suction roll. The forming shoes **16, 23**, particularly those arranged in the third section III, can, if necessary, be provided with a suction device.

Further elements of the twin-wire former shown in FIG. **2** are water-collection containers **41, 42** and **43**, guide plates **44** associated with the fixed strips **28**, and a water removal strip **45**. The other elements are provided with the same reference numbers as the corresponding elements in FIG. **1**. The same is true with regard to FIG. **3**. One possible modification of FIG. **3** can consist therein that, instead of the wire suction roll **20**, a forming roll is provided, and instead of the guide roll **19** the wire suction roll. A similar arrangement is known from German Utility Model 88 06 036 (Voith File: P 4539). Aside from this exception and aside from the embodiment according to FIG. **2** (with forming roll **40**), the invention will, however, be used whenever possible-so to design the twin-wire former that the relatively expensive forming roll (as to purchase and operation) can be dispensed with. Thus, as a rule, the wire suction roll **20** is present as the sole suction roll. Furthermore, in all embodiments of the invention it can be seen to it that no guide roll which deflects the twin-wire zone (and has the above-mentioned injurious table-roll effect) is present.

The embodiment of FIG. **4** differs from FIG. **1** among other things by the fact that, in the first section I of the twin-wire zone, a second curved stationary forming shoe **16*a*** is arranged in the loop of the lower wire **11** behind and spaced from a first curved stationary forming shoe **16**. Furthermore, in the loop of the upper wire **12** in the region between the two stationary forming shoes **16** and **16*a*** there is provided an individual strip **50** which in known manner is part of a vacuum chamber **51**. This vacuum chamber **51**, similar to the upper drainage box **18** of FIG. **1**, is suspended on its front and rear ends in vertically displaceable mounts. In this way, both the depth of penetration of the strip **50** into the path of travel of the upper wire **12** as well as the angle of attack of the strip **50** can be varied. With slight depth of penetration, the strip **50** serves solely for removal of water, while with greater depth of penetration it serves, in addition, for the production of turbulence in the suspension and, thus, for improvement of the formation. By the presence of two separate forming shoes **16** and **16*a***, the pre-drainage on both sides is temporarily interrupted; it is only continued after the strip **50** has removed from the upper wire **12** the water which has penetrated upward on the first forming shoe **16**. In this way, higher operating speeds are possible.

Another difference from FIG. **1** is that, in the second section II of the twin-wire zone, the lower, flexibly supported strips **57** and the upper, firmly supported strips **58** are developed as individual strips. This means that each strip has its own supporting body **55/56**. The lower strip-supporting bodies **55** are swingably mounted, the strip **57** being pressed resiliently by the force of springs **54** against support bottom of the lower wire **11**. The supporting body **56** of each of the upper strips **58** is developed as vacuum chamber in the same way as that of the strip **50**. The suspension of these vacuum chambers **56** corresponds to that of the vacuum chamber **51**. It is important that each of the strips **57** and **58** rest with a given force of application (corresponding to the suspension pressure) against its wire belt **11** or **12**. The strips **57** and **58** are adjusted in such a manner that a slight deflection of the wire belts takes place preferably on each strip. Due to the resilient supporting of the lower strips **57**, the adjustment, once effected, is insensitive to changes in the quantity or quality of pulp, so that no backing up takes place in front of the strips and, nevertheless, an effective introduction of turbulence forces into the fiber suspension takes place. In contradistinction to FIGS. **1** to **3**, there is the possibility of adjusting each one of the strips **57/58** individually with respect to position in height and inclination relative to the travel path of the wire. In this way, one can even better control the quality of the paper produced, with respect to both the formation and the nature of its surface (printability). Differing from FIG. **4**, the upper strips **58** could be supported resiliently and the lower strips **57** stationary. Another alternative could consist therein that not only the upper strips **58** but also the lower strips **57** are fastened in vertically displaceable mounts (as shown on the vacuum chamber **51**). In such case, the springs **54** might possibly be eliminated.

Another difference between FIGS. **1** and **4** resides in the fact that in FIG. **4** the twin-wire zone rises in the direction of travel of the wires upwards with an inclination of, on the average, about 20° with respect to the horizontal. In this way, it is possible to keep the entire height of the twin-wire former relatively slight. In the third section III of the twin-wire zone, a flat forming shoe **23'** is provided rather than a curved one, differing from FIG. **1**. The separation of the upper wire **12** from the lower wire and the fiber web formed can take place, as in FIG. **1**, on one of the flat suction boxes **31**. Instead of this, however, the upper wire **12** can also be conducted up to the wire suction roll **20**. There, as shown, it can wrap around a small part (or, alternatively, a larger part) of the circumference of the wire suction roll and then be returned via the reversing roll **19**.

In the embodiment shown in FIG. **5**, the twin-wire zone, as a whole, extends substantially in horizontal direction. The individual elements are substantially the same as in the embodiment of FIG. **4**. However, there is the difference that the drainage strips **57** and **58** lying in the second section II of the twin-wire zone are arranged along a downwardly curved path of the twin-wire zone. Accordingly, an upwardly curved forming shoe **16, 23** is provided in the first section I and in the third section III of the twin-wire zone. This embodiment is advisable, in particular, for the modernizing of existing Fourdrinier paper machines.

The embodiments shown have the feature in common that, in the second section II of the twin-wire zone, there are present preferably n flexibly supported strips **27/57** and n+1 rigidly supported strips. However, it is also possible to make the number of flexibly supported strips equal to or greater by one than the number of rigidly supported strips. Instead of a rigidly supported strip, a feed or discharge edge of a drainage box can also be provided. The minimum number n of flexibly supported strips is two (see FIG. **4**). However, three or four flexibly supported strips are preferred.

What is claimed is:

1. A method for the production of a paper web from a fiber suspension in a twin wire former comprising:

causing first and second web forming wire belts to travel along a path together to form a twin wire zone of the twin wire former, with the web between the wire belts as the wire belts travel along the path through the twin wire zone, each wire belt forming an endless loop;

feeding the wire belts across a single forming roll at the start of the path through the twin wire zone;

supporting the wire belts such as to form a wedge shaped entrance slot into the twin wire zone;

supplying a fiber suspension from a headbox directly to the wedge shaped entrance slot of the twin wire zone;

draining water from the fiber suspension by means of the forming roll in order to start the forming of the web from the fiber suspension;

feeding the wire belts with the fiber suspension and the web being generated therebetween downstream of the forming roll between a plurality of first drainage strips, which are positioned within the loop of the first wire belt for contacting the first wire belt, and a plurality of second drainage strips, which are positioned within the loop of the second wire belt for contacting the second wire belt, the first strips being shifted in position along the path of the wire belts with respect to the second strips so that the first and second strips are offset and in a non-opposing relationship;

resiliently supporting the first drainage strips against the first wire belt that the strips contact;

rigidly supporting the second drainage strips against the second wire belt;

feeding the wire belts with the web therebetween downstream of said drainage strips across a stationary drainage element and then across a suction roll in the twin wire zone such that as the wire belts travel over the stationary drainage element and over said suction roll, water is drained through the wire belt in contact with said stationary drainage element and with said suction roll; and

maintaining the twin wire zone apart from said single forming roll and said suction roll free of rolls which would deflect the twin wire zone.

2. The method of claim **1**, further comprising supplying a vacuum in the area of the second drainage strips.

3. A twin-wire former for the production of a paper web from a fiber suspension, the twin wire former comprising:

first and second web forming wire belts which travel along a path together for forming a twin wire zone of the twin wire former, with the web between the wire belts as the wire belts travel along the path through the twin wire zone, neither wire belt defining a single wire predrainage zone;

each wire belt forming an endless loop;

the twin wire zone having a first section which includes a single forming roll at the start of the path of the wire belts through the twin wire zone; supports which support the wire belts for forming a wedge shaped entrance slot into the first section;

a fiber suspension supplying headbox having an outlet placed and directed for delivering fiber suspension from the headbox to the wedge shaped entrance slot of the first section of the twin wire zone;

said single forming roll having an open surface to enable drainage of water from the fiber suspension and being curved along the path of the wire belts through the twin wire zone, the single forming roll being engaged by one of the wire belts and being arranged for curving the path of both wire belts around the single forming roll after the entrance of the suspension into the entrance slot;

the twin wire zone having a second section following the first section along the path of the wire belts through the twin wire zone; in the second section, a plurality of the first drainage strips are positioned within the loop of the first wire belt and are for contacting the first wire belt; in the second section, a plurality of second drainage strips are positioned within the loop of the second wire belt and are for contacting the second wire belt; the first strips being shifted in position along the path of the wire belts with respect to the second strips so that the first and second strips are offset and in a non-opposing relationship; a first strip support which resiliently supports the first drainage strips against the first wire belt that the first strips contact;

a second strip support which supports the second drainage strips rigidly against the second wire belt;

the twin wire zone having a third section following the second section along the path of the wire belts through the twin wire zone; drainage elements in the third section, for being engaged by one of the wire belts as the wire belts travel over the drainage elements, the drainage elements including at least one stationary dewatering element followed by a suction roll and having an open surface to enable water to be drained through the wire belt in contact therewith; and

the twin wire zone apart from said single forming roll and said suction roll being free of rolls which deflect the twin wire zone.

4. The twin-wire former of claim **3**, further comprising a supplier of vacuum in the area of the second drainage strips.

5. A method for the production of a paper web from a fiber suspension in a twin wire former comprising:

causing first and second web forming wire belts to travel along a path together to form a twin wire zone of the twin wire former, with the web between the wire belts as the wire belts travel along the path through the twin wire zone, each wire belt forming an endless loop;

feeding the wire belts across a stationary curved forming shoe at the start of the path through the twin wire zone;

supporting the wire belts such as to form a wedge shaped entrance slot into the twin wire zone;

supplying a fiber suspension from the head box directly to the wedge shaped entrance slot of the twin wire zone;

draining water from the fiber suspension by means of the forming shoe in order to start the forming of the web from the fiber suspension;

feeding the wire belts with the fiber suspension and the web being generated therebetween downstream of the forming shoe between a plurality of first drainage strips, which are positioned within the loop of the first wire belt for contacting the first wire belt, and a plurality or second drainage strips, which are positioned within the loop of the second wire belt for contacting the second wire belt, the first strips being shifted in position along the path of the wire belts with respect to the second strips so that the first and second strips are offset and in a non-opposing relationship;

resiliently supporting the first drainage strips against the first wire belt that the strips contact;

rigidly supporting the second drainage strips against the second wire belt;

feeding the wire belts with the web therebetween downstream of said drainage strips across a stationary drainage element and then across a suction roll in the twin wire zone such that as the wire belts travel over the stationary drainage element and the suction roll, water is drained through the wire belt in contact with said stationary drainage element and the suction roll; and

maintaining the twin wire zone apart from said suction roll free of rolls which would deflect the twin wire zone.

6. The method of claim **5**, further comprising supplying a vacuum in the area of the second drainage strips.

7. A twin-wire former for the production of a paper web from a fiber suspension, the twin wire former comprising:

first and second web forming wire belts which travel along a path together for forming a twin wire zone of the twin wire former, with the web between the wire belts as the wire belts travel along the path through the twin wire zone, neither wire belt defining a single wire predrainage zone;

each wire belt forming an endless loop;

the twin wire zone having a first section which includes a stationary curved forming shoe at the start of the path of the wire belts through the twin wire zone; supports which support the wire belts for forming a wedge shaped entrance slot into the first section;

a fiber suspension supplying headbox having an outlet placed and directed for delivering fiber suspension from the headbox to the wedge shaped entrance slot of the first section of the twin wire zone;

said stationary curved forming shoe having an open surface to enable drainage of water from the fiber suspension and being curved along the path of the wire belts through the twin wire zone, the forming shoe being engaged by one of the wire belts and being arranged for curving the path of both wire belts around the forming shoe after the entrance of the suspension into the entrance slot;

the twin wire zone having a second section following the first section along the path of the wire belts through the twin wire zone; in the second section, a plurality of the first drainage strips are positioned within the loop of the first wire belt and are for contacting the first wire belts; in the second section, a plurality of second drainage strips are positioned within the loop of the second wire belt and are for contacting the second wire belt; the first strips being shifted in position along the path of the wire belts with respect to the second strips so that the first and second strips are offset and in a non-opposing relationship; a first strip support which resiliently supports the first drainage strips against the first wire belt that the first strips contact;

a second strip support which supports the second drainage strips rigidly against the second wire belt;

the twin wire zone having a third section following the second section along the path of the wire belts through the twin wire zone; a stationary drainage element followed by a suction roll in the third section, for being engaged by one of the wire belts as the wire belts travel over the stationary drainage element and said suction roll, the stationary drainage element and said suction

roll having an open surface to enable water to be drained through the wire belt in contact therewith; and the twin wire zone apart from said suction roll being free of rolls which deflect the twin wire zone.

8. The twin-wire former of claim 7, further comprising a supplier of vacuum in the area of the second drainage strips.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 5,972,168
DATED : October 26, 1999
INVENTOR(S) : Egelhof, et. al.

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Please correct the first name of the 7th inventor's legal representative as follows:
[75] Else Bück, legal representative

Please add the following missing priority data:
[30] **Foreign Application Priority Data**
August 22, 1989 [DE] Germany....P 39 27 597.3

Please correct the Related U.S. Application Data as follows:
[62] Continuation of application No. 09/023,435, Feb. 13, 1998, which is a continuation of application No. 08/556,769, Nov. 2, 1995, Pat. No. 5,718,805, which is a continuation of application No. 08/286,948, Aug. 8, 1994, Pat. No. 5,500,091, which is a continuation of application No. 08/055,918, April 29, 1993, Pat. No. 5,389,206, which is a continuation of application No. 07/773,965, Nov. 12, 1998, abandoned, **filed as application No. PCT/EP90/01313, Aug. 9, 1990.**

Signed and Sealed this
Thirtieth Day of May, 2000

Attest:

Attesting Officer

Q. TODD DICKINSON
Director of Patents and Trademarks

JS 44 (Rev. 11/04)

CIVIL COVER SHEET

The JS 44 civil cover sheet and the information contained herein neither replace nor supplement the filing and service of pleadings or other papers as required by law, except as provided by local rules of court. This form, approved by the Judicial Conference of the United States in September 1974, is required for the use of the Clerk of Court for the purpose of initiating the civil docket sheet. (SEE INSTRUCTIONS ON THE REVERSE OF THE FORM.)

I. (a) PLAINTIFFS
VOITH PAPER GMBH & CO. KG,

DEFENDANTS
JOHNSONFOILS, INC.

(b) County of Residence of First Listed Plaintiff New Castle
(EXCEPT IN U.S. PLAINTIFF CASES)

County of Residence of First Listed Defendant _____
(IN U.S. PLAINTIFF CASES ONLY)
NOTE: IN LAND CONDEMNATION CASES, USE THE LOCATION OF THE LAND INVOLVED.

(c) Attorney's (Firm Name, Address, and Telephone Number)
Adam W. Poff (No. 3990)
Young Conaway Stargatt & Taylor, LLP
The Brandywine Building, 1000 West St., Wilmington, DE 19801

Attorneys (If Known)

II. BASIS OF JURISDICTION (Place an "X" in One Box Only)

- ☐ 1 U.S. Government Plaintiff
- ☒ 3 Federal Question (U.S. Government Not a Party)
- ☐ 2 U.S. Government Defendant
- ☐ 4 Diversity (Indicate Citizenship of Parties in Item III)

III. CITIZENSHIP OF PRINCIPAL PARTIES (Place an "X" in One Box for Plaintiff and One Box for Defendant)
(For Diversity Cases Only)

	PTF	DEF		PTF	DEF
Citizen of This State	☐ 1	☐ 1	Incorporated *or* Principal Place of Business In This State	☐ 4	☐ 4
Citizen of Another State	☐ 2	☐ 2	Incorporated *and* Principal Place of Business In Another State	☐ 5	☐ 5
Citizen or Subject of a Foreign Country	☐ 3	☐ 3	Foreign Nation	☐ 6	☐ 6

IV. NATURE OF SUIT (Place an "X" in One Box Only)

CONTRACT
- ☐ 110 Insurance
- ☐ 120 Marine
- ☐ 130 Miller Act
- ☐ 140 Negotiable Instrument
- ☐ 150 Recovery of Overpayment & Enforcement of Judgment
- ☐ 151 Medicare Act
- ☐ 152 Recovery of Defaulted Student Loans (Excl. Veterans)
- ☐ 153 Recovery of Overpayment of Veteran's Benefits
- ☐ 160 Stockholders' Suits
- ☐ 190 Other Contract
- ☐ 195 Contract Product Liability
- ☐ 196 Franchise

REAL PROPERTY
- ☐ 210 Land Condemnation
- ☐ 220 Foreclosure
- ☐ 230 Rent Lease & Ejectment
- ☐ 240 Torts to Land
- ☐ 245 Tort Product Liability
- ☐ 290 All Other Real Property

TORTS

PERSONAL INJURY
- ☐ 310 Airplane
- ☐ 315 Airplane Product Liability
- ☐ 320 Assault, Libel & Slander
- ☐ 330 Federal Employers' Liability
- ☐ 340 Marine
- ☐ 345 Marine Product Liability
- ☐ 350 Motor Vehicle
- ☐ 355 Motor Vehicle Product Liability
- ☐ 360 Other Personal Injury

PERSONAL INJURY
- ☐ 362 Personal Injury - Med. Malpractice
- ☐ 365 Personal Injury - Product Liability
- ☐ 368 Asbestos Personal Injury Product Liability

PERSONAL PROPERTY
- ☐ 370 Other Fraud
- ☐ 371 Truth in Lending
- ☐ 380 Other Personal Property Damage
- ☐ 385 Property Damage Product Liability

CIVIL RIGHTS
- ☐ 441 Voting
- ☐ 442 Employment
- ☐ 443 Housing/ Accommodations
- ☐ 444 Welfare
- ☐ 445 Amer. w/Disabilities - Employment
- ☐ 446 Amer. w/Disabilities - Other
- ☐ 440 Other Civil Rights

PRISONER PETITIONS
- ☐ 510 Motions to Vacate Sentence

Habeas Corpus:
- ☐ 530 General
- ☐ 535 Death Penalty
- ☐ 540 Mandamus & Other
- ☐ 550 Civil Rights
- ☐ 555 Prison Condition

FORFEITURE/PENALTY
- ☐ 610 Agriculture
- ☐ 620 Other Food & Drug
- ☐ 625 Drug Related Seizure of Property 21 USC 881
- ☐ 630 Liquor Laws
- ☐ 640 R.R. & Truck
- ☐ 650 Airline Regs.
- ☐ 660 Occupational Safety/Health
- ☐ 690 Other

LABOR
- ☐ 710 Fair Labor Standards Act
- ☐ 720 Labor/Mgmt. Relations
- ☐ 730 Labor/Mgmt.Reporting & Disclosure Act
- ☐ 740 Railway Labor Act
- ☐ 790 Other Labor Litigation
- ☐ 791 Empl. Ret. Inc. Security Act

BANKRUPTCY
- ☐ 422 Appeal 28 USC 158
- ☐ 423 Withdrawal 28 USC 157

PROPERTY RIGHTS
- ☐ 820 Copyrights
- ☒ 830 Patent
- ☐ 840 Trademark

SOCIAL SECURITY
- ☐ 861 HIA (1395ff)
- ☐ 862 Black Lung (923)
- ☐ 863 DIWC/DIWW (405(g))
- ☐ 864 SSID Title XVI
- ☐ 865 RSI (405(g))

FEDERAL TAX SUITS
- ☐ 870 Taxes (U.S. Plaintiff or Defendant)
- ☐ 871 IRS—Third Party 26 USC 7609

OTHER STATUTES
- ☐ 400 State Reapportionment
- ☐ 410 Antitrust
- ☐ 430 Banks and Banking
- ☐ 450 Commerce
- ☐ 460 Deportation
- ☐ 470 Racketeer Influenced and Corrupt Organizations
- ☐ 480 Consumer Credit
- ☐ 490 Cable/Sat TV
- ☐ 810 Selective Service
- ☐ 850 Securities/Commodities/ Exchange
- ☐ 875 Customer Challenge 12 USC 3410
- ☐ 890 Other Statutory Actions
- ☐ 891 Agricultural Acts
- ☐ 892 Economic Stabilization Act
- ☐ 893 Environmental Matters
- ☐ 894 Energy Allocation Act
- ☐ 895 Freedom of Information Act
- ☐ 900Appeal of Fee Determination Under Equal Access to Justice
- ☐ 950 Constitutionality of State Statutes

V. ORIGIN (Place an "X" in One Box Only)

☒ 1 Original Proceeding ☐ 2 Removed from State Court ☐ 3 Remanded from Appellate Court ☐ 4 Reinstated or Reopened ☐ 5 Transferred from another district (specify) ☐ 6 Multidistrict Litigation ☐ 7 Appeal to District Judge from Magistrate Judgment

VI. CAUSE OF ACTION

Cite the U.S. Civil Statute under which you are filing **(Do not cite jurisdictional statutes unless diversity)**:
35 U.S.C. §§ 101 et seq.
Brief description of cause: Patent infringement

VII. REQUESTED IN COMPLAINT:

☐ CHECK IF THIS IS A **CLASS ACTION** UNDER F.R.C.P. 23

DEMAND $

CHECK YES only if demanded in complaint:
JURY DEMAND: ☒ Yes ☐ No

VIII. RELATED CASE(S) IF ANY

(See instructions): JUDGE _____ DOCKET NUMBER _____

DATE 4/27/07

SIGNATURE OF ATTORNEY OF RECORD

FOR OFFICE USE ONLY

RECEIPT # _____ AMOUNT _____ APPLYING IFP _____ JUDGE _____ MAG. JUDGE _____

AO FORM 85 RECEIPT (REV. 9/04)

United States District Court for the District of Delaware

Civil Action No. -07-226-

ACKNOWLEDGMENT OF RECEIPT FOR AO FORM 85

NOTICE OF AVAILABILITY OF A UNITED STATES MAGISTRATE JUDGE TO EXERCISE JURISDICTION

I HEREBY ACKNOWLEDGE RECEIPT OF 2 COPIES OF AO FORM 85.

APR 27 2007
(Date forms issued)

(Signature of Party or their Representative)

FRANK JOYCE / PARCELS
(Printed name of Party or their Representative)

Note: Completed receipt will be filed in the Civil Action